

Specifier's Reference
Project
Type
Model No.
Comments or Special Instructions

# ILL-PA-18 END FITTING SPECIFICATION

## APPLICATION

A round walkover paver manufactured from stainless steel with toughened clear or frosted glass.

The ILL-PA-18 is especially useful in high traffic areas, as it has a ribbed flange to help prevent slipping in wet areas. Can be used with pool pipe to aid installation in concrete or tarmac.

Our paver fittings are suitable for use in a variety of different applications and are the ideal solution to floor level lighting both indoors and outside.


Uses include:

- Marker lighting for pathways and entrances
  - Wall washing, inside or out
  - Uplighting columns or archways
  - Mood lighting in any room in the house, including wet rooms and pool areas
- Paver fittings can be installed in many surfaces including wooden floors, decking, paving, stair skirting and concrete.



## SPECIFICATION

Glass:	Clear or frosted
Beam Angle:	70°
Material:	Stainless steel
Colours available:	Natural
Flange size:	90 mm
Weight:	762.1g
Mounting hole size:	54 mm
Ferrule size:	M10 or 8 mm smooth
Min. Fibre size:	2 mm
Max. Fibre size:	8 mm

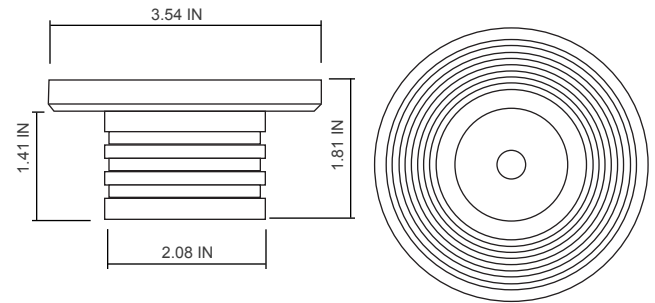

## Ordering Information

ILL-PA-18CG (clear glass)

ILL-PA-18FG (frosted glass)

